


Test point for monitoring  
chopper servo voltage  
typically set to 3.25-3.5  
VDC

POT to adjust chopper servo voltage

10-pin Circular  
Connector

- A
- B
- C
- D
- E
- F
- H
- G

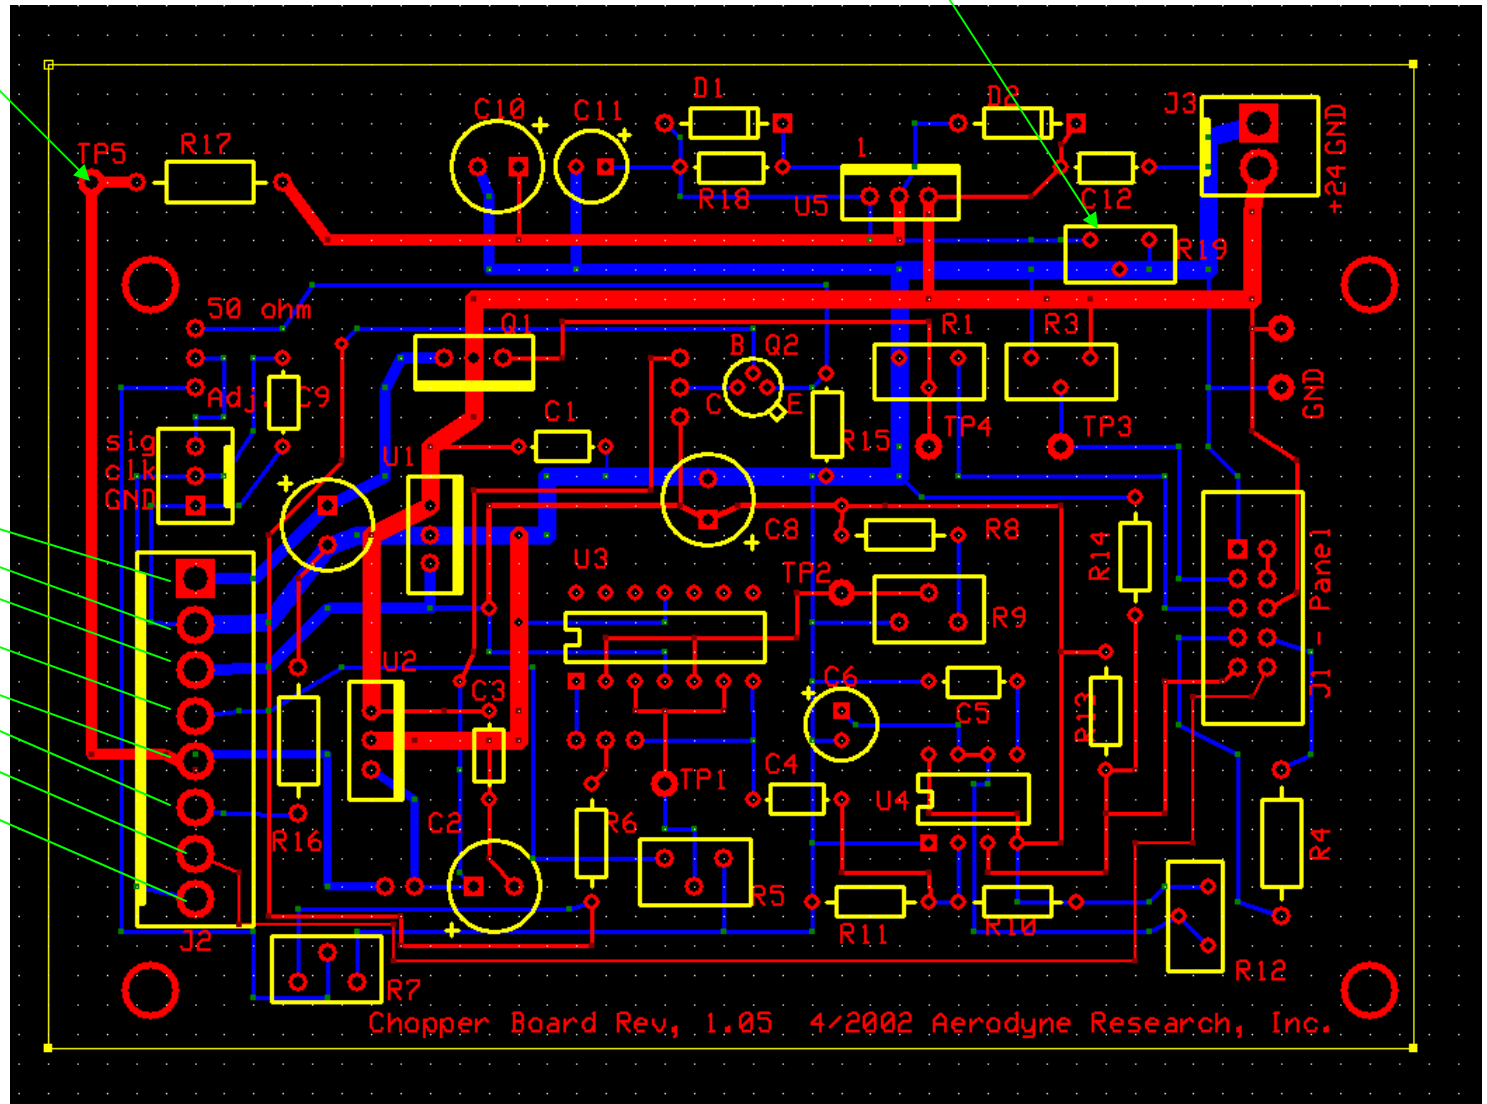

Chopper circuit board inside the AMS Electronics Box